



OZONE GENERATOR

COM-AD-01-IP

FEATURES

- METAL FREE
- NO SEALS
- MAINTENANCE FREE
- WEAR FREE
- NO EMISSION OF PARTICLES
- NO CAPACITY WORSENING

APPLICATIONS

- RESEARCH & DEVELOPMENT
- SEMICONDUCTOR PROCESSING
- ULTRA PURE WATER TREATMENT
- WATER STERILIZATION
- FOOD PRODUCTION
- PHARMACEUTICAL PRODUCTION
- PILOT INSTALLATIONS



SPECIFICATIONS



- POWER SUPPLY:
 - 230 V, 50/60 Hz, 0,5 A
 - 115 V, 50/60 Hz, 1 A (OPTION)
- OZONE GENERATION:
2.7 gO₃/h @ 100NI/h
- OZONE CONCENTRATION:
UP TO 150 gO₃/Nm³
- FREQUENCY CONTROLLED
- LINEAR PRODUCTION RANGE
- REMOTE CONTROL (OPTION)
- CONTROL RANGE: 0-100%
- AIR COOLED

ENCLOSURE

- WALL HOUSING (with splash protection):
300(W) x 180(D) x 400(H) mm
- WEIGHT: 8 kg

DATA SHEET

TEST CONDITIONS: FEED GAS: SEP (94%O₂, 6% N₂), ROOM TEMPERATURE: 24°C

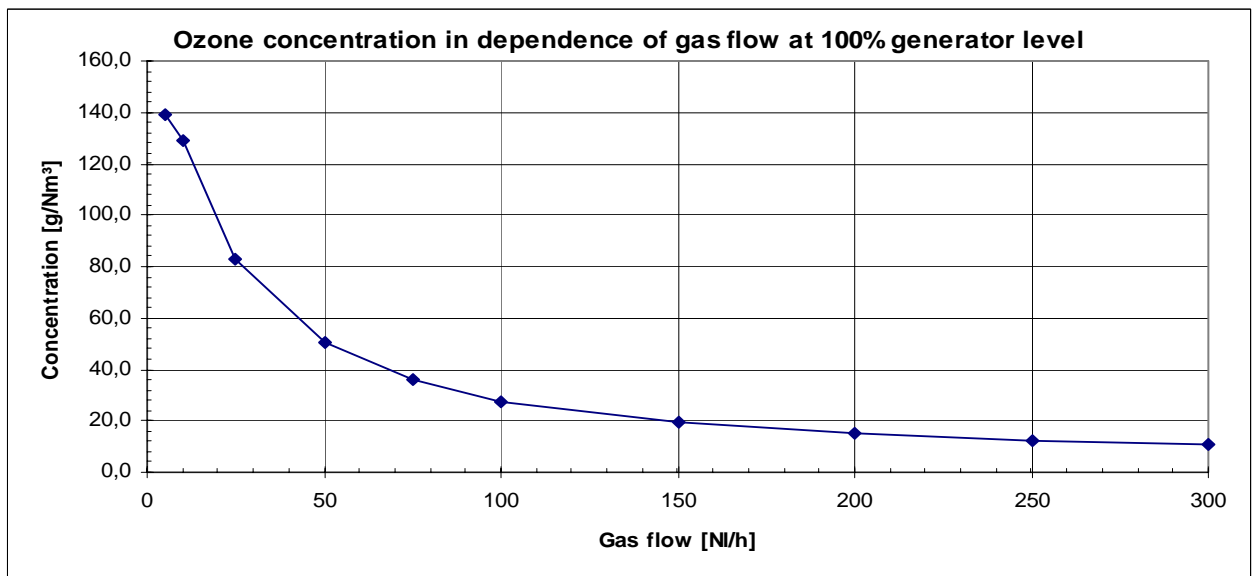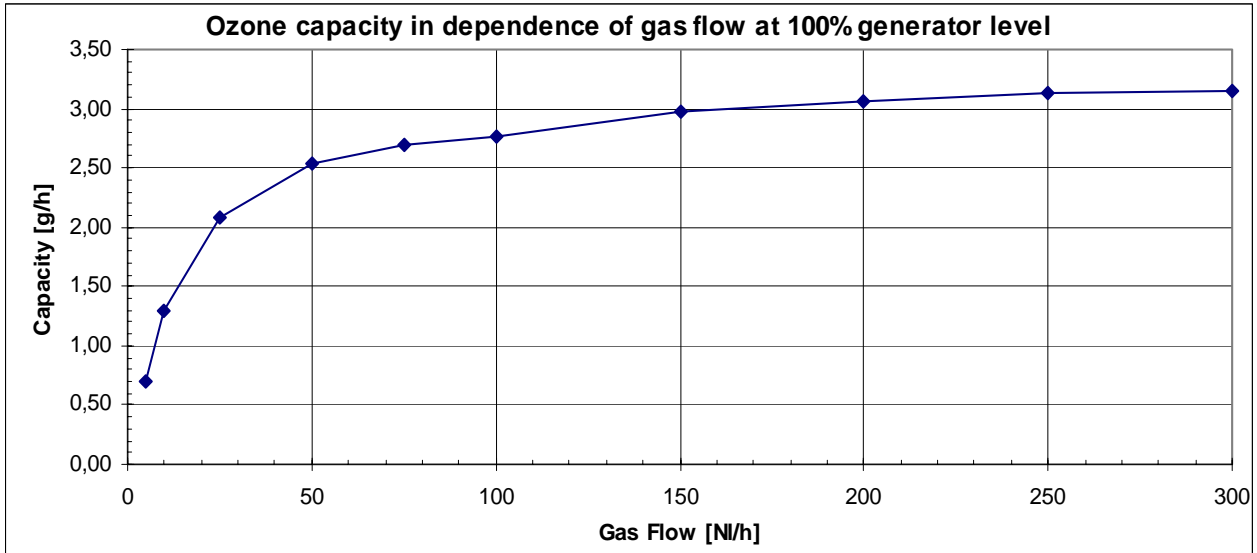

DISTRIBUTED BY:

MANUFACTURER:



ANSEROS KLAUS NONNENMACHER GMBH
D-72070 TÜBINGEN · DISCHINGERWEG 11
PHONE +49.7071-7995-0 · FAX +49.7071-7995-95
info@anseros.de · www.anseros.de

IMPORTANT NOTE: The information provided in this document is intellectual property and under copyright of Anseros Klaus Nonnenmacher GmbH. Without their written consent, the document may not be altered, distributed partially or copied to a website. Devices depicted may contain optional features. Anseros reserves the right to make technical changes for better performance without prior notification. © Copyright ANSEROS