



OZONE GENERATOR

COM-AD-04



FEATURES

- METAL FREE
- NO SEALS
- NO EMISSION OF PARTICLES
- MAINTENANCE FREE
- WEAR FREE
- NO CAPACITY WORSENING

APPLICATIONS

- SEMICONDUCTOR PROCESSING
- WATER STERILIZATION
- ULTRA PURE WATER TREATMENT
- FOOD PRODUCTION
- RESEARCH & DEVELOPMENT
- PHARMACEUTICAL PRODUCTION
- PILOT INSTALLATIONS

SPECIFICATIONS




- POWER SUPPLY:
230 V, 50/60 HZ, 1,2A
115 V, 50/60 Hz (OPTION)
- OZONE GENERATION:
18gO₃/h @ 250 NI/h
- OZONE CONCENTRATION:
UP TO 190 gO₃/Nm³
- FREQUENCY CONTROLLED
- LINEAR PRODUCTION RANGE
- REMOTE CONTROL (OPTION)
- CONTROL RANGE: 0-100%
- AIR COOLED

ENCLOSURE

- 19" INSERTION:
 - 6 HU (266mm), DEPTH 465 MM
 - WEIGHT: 18 KG
- TABLE HOUSING:
 - 515(W) X 500(D) X 300(H) MM (OPTIONAL)
 - WEIGHT: 22 KG

DATA SHEET

TEST CONDITIONS: FEED GAS: SEP (94%O₂, 6% N₂), ROOM TEMPERATURE: 12°C

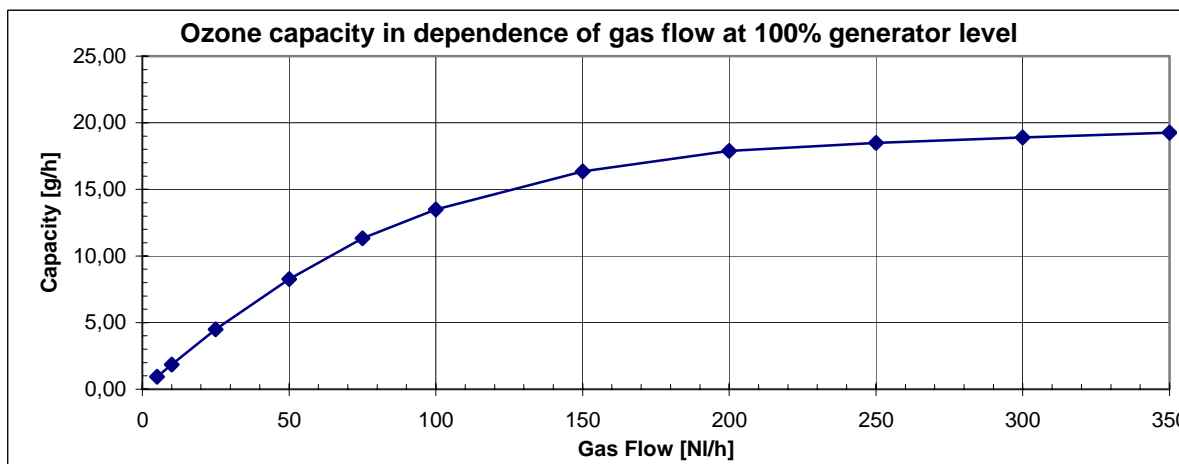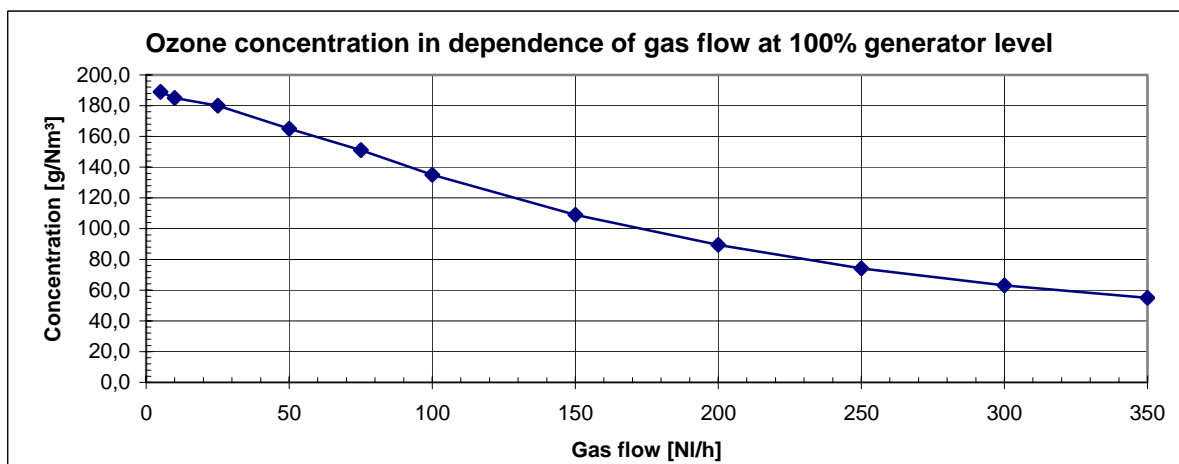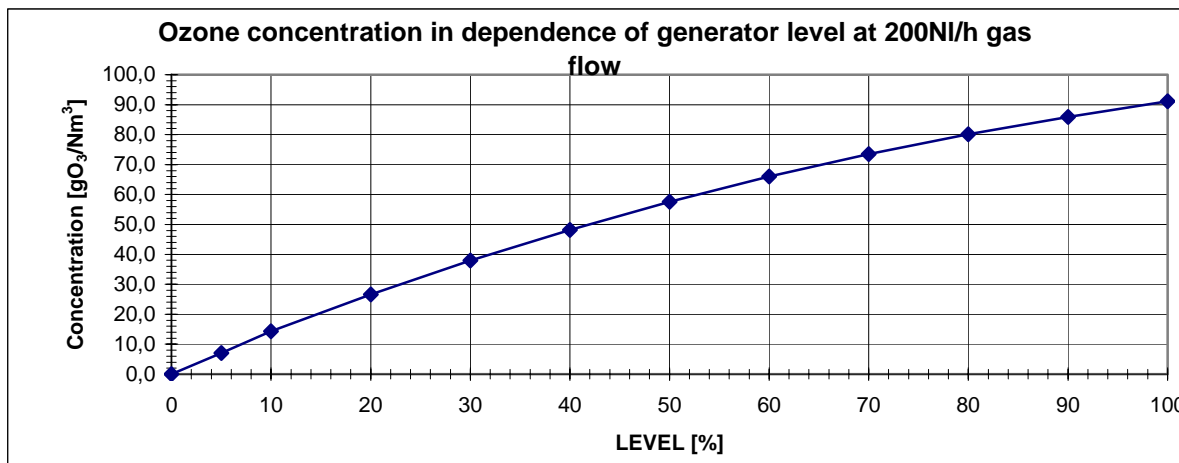

DISTRIBUTED BY: _____

MANUFACTURER: _____



ANSEROS KLAUS NONNENMACHER GMBH
 D-72070 TÜBINGEN · DISCHINGERWEG 11
 PHONE +49.7071-7995-0 · FAX +49.7071-7995-95
 info@anseros.de · www.anseros.de

IMPORTANT NOTE: The information provided in this document is intellectual property and under copyright of Anseros Klaus Nonnenmacher GmbH. Without their written consent, the document may not be altered, distributed partially or copied to a website. Devices depicted may contain optional features. Anseros reserves the right to make technical changes for better performance without prior notification. © Copyright ANSEROS