



OZONE GENERATOR COM-AD-08



COM-AD-08

FEATURES

- METAL FREE
- NO SEALS
- NO EMISSION OF PARTICLES
- MAINTENANCE FREE
- WEAR FREE
- NO CAPACITY WORSENING

APPLICATIONS

- SEMICONDUCTOR PROCESSING
- WATER STERILIZATION
- WATER TREATMENT
- FOOD PROCESSING
- RESEARCH & DEVELOPMENT
- ULTRA PURE WATER TREATMENT
- PHARMACEUTICAL PRODUCTION

SPECIFICATIONS

- POWER SUPPLY:
230 V, 50/60 Hz, 1,2A
115 V, 50/60 Hz (OPTION)
- OZONE GENERATION:
40 g O₃/h @ 300 NI/h
- OZONE CONCENTRATION:
UP TO 200 gO₃/Nm³
- LINEAR PRODUCTION RANGE
- REMOTE CONTROL (OPTION)
- CONTROL RANGE: 0-100%
- WATER COOLED

ENCLOSURE

- 19" INSERTION:
9 HU (400 mm), DEPTH 560 mm
WEIGHT: 45 KG




CONTROL PANEL



- INTERNAL DIAGNOSTIC SYSTEM
- DIGITAL PROCESS CONTROL
- DIGITAL CAPACITY CONTROL
- MODE & CAPACITY DISPLAY
(alpha numeric / with LEDs)
- SMOOTH START-UP MODE
- KEYPAD

DATA SHEET

TEST CONDITIONS: FEED GAS: OXYGEN, ROOM TEMPERATURE: 20°C

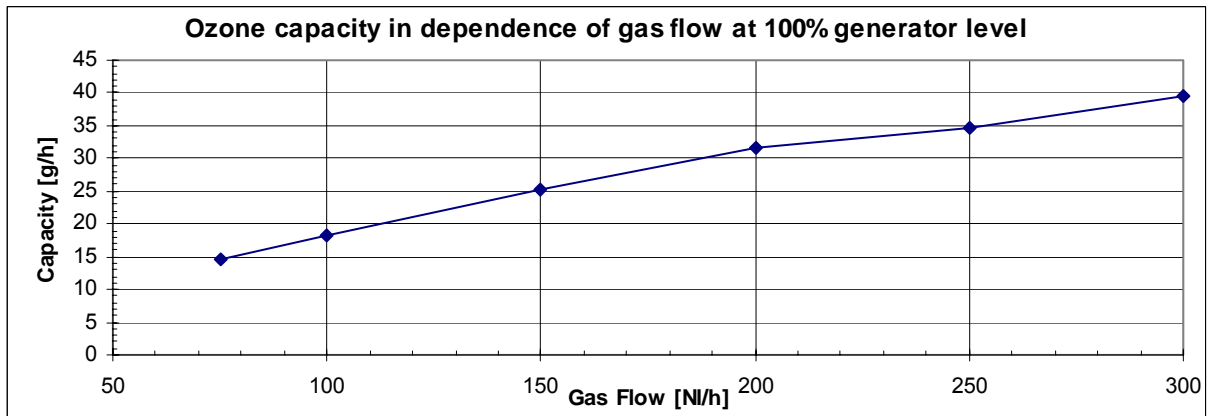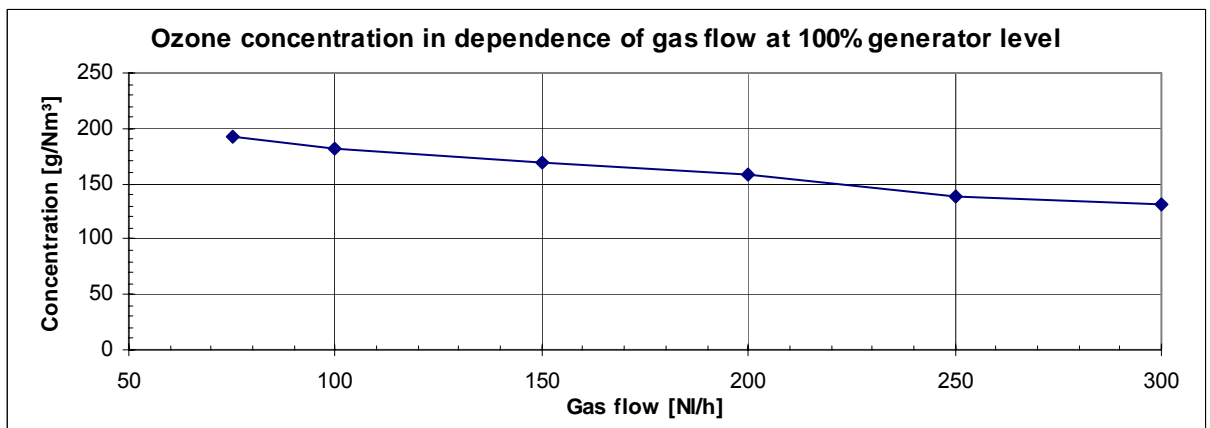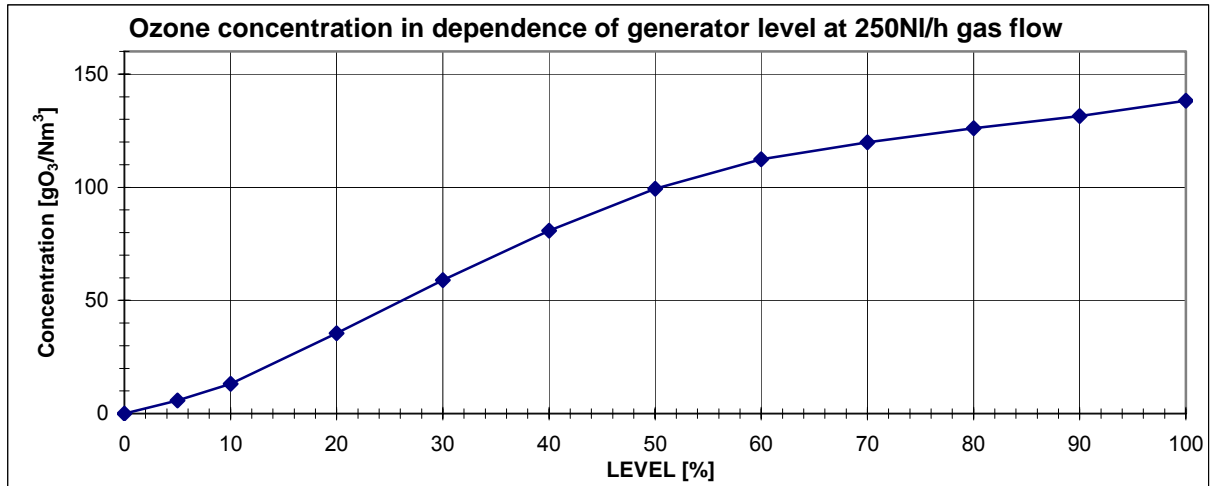

DISTRIBUTED BY:

MANUFACTURER:



ANSEROS KLAUS NONNENMACHER GMBH
D-72070 TÜBINGEN · DISCHINGERWEG 11
PHONE +49.7071-7995-0 · FAX +49.7071-7995-95
info@anseros.de · www.anseros.de