


COM

OZONE GENERATOR COM-VD-6000

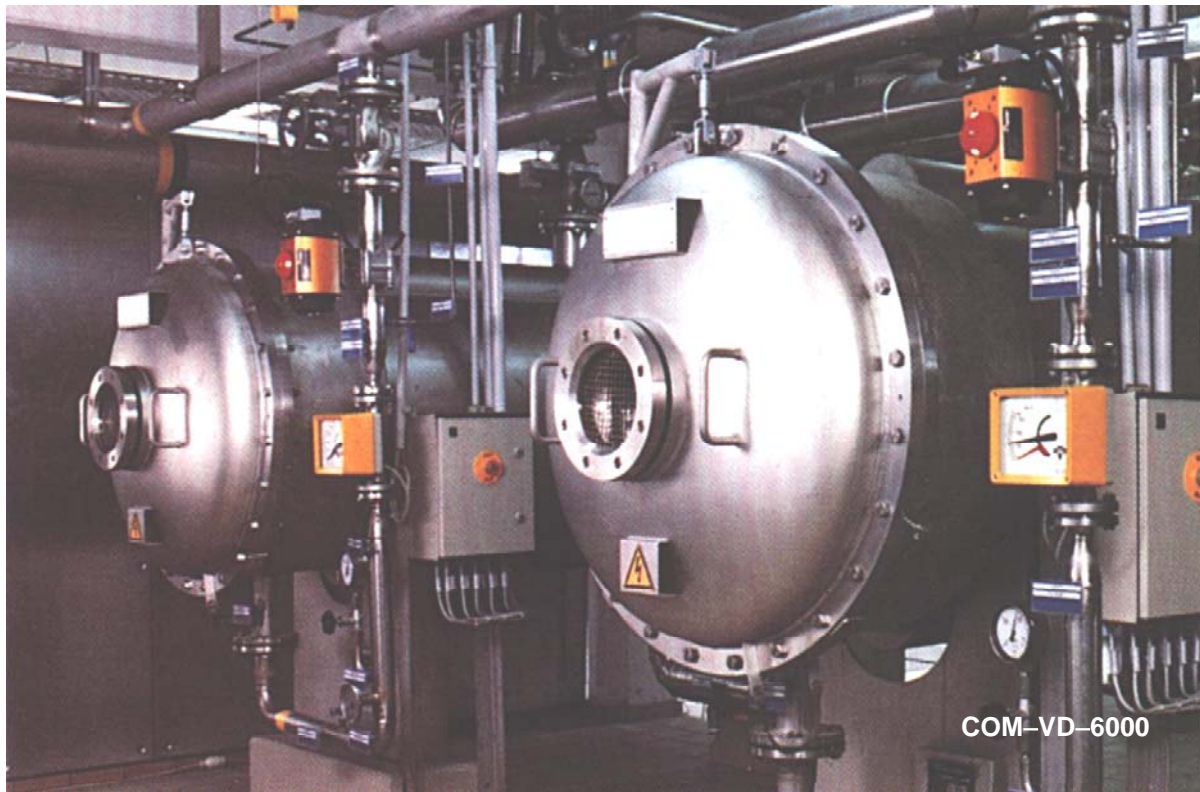

APPLICATION

- economic ozone generators for treatment of water intended for human consumption.

FEATURES

- highly efficient surface discharge principle for ozone production from air or oxygen.
- long-life guarantee for ozone module of 10 years.
- related to European standard CEN/TR 14740 and German standard DIN 19627.

SPECIFICATIONS

ozone capacity:	6000 g O ₃ /h
ozone Concentration:	140 g O ₃ /Nm ³
efficiency:	10 kWh/kg O ₃
cooling water flow:	6.5 m ³ /h (15 °C)
outlet gas pressure:	1.8 bar (g)
operating frequency:	8 kHz
power variation:	10–100 %
power supply:	380 V / 50 Hz / 3 Ph

DISTRIBUTED BY: _____

MANUFACTURER: _____



ANSEROS

ANSEROS KLAUS NONNENMACHER GMBH

D-72070 TÜBINGEN · DISCHINGERWEG 11
PHONE +49.7071-7995-0 · FAX +49.7071-7995-95
INFO@ANSEROS.DE · WWW.ANSEROS.DE

IMPORTANT NOTE: The information provided in this document is intellectual property and under copyright of Anseros Klaus Nonnenmacher GmbH. Without their written consent, the document may not be altered, distributed partially or copied to a website. Devices depicted may contain optional features. Anseros reserves the right to make technical changes for better performance without prior notification.

© Copyright ANSEROS